

**Acme Buck Boost Transformer**

**T181047 - T211689**


120x240 Primary Volts - 12/24 Secondary Volts

<b>Subcategory :</b>	Buck Boost
<b>Phase :</b>	Single
<b>Frequency:</b>	60 Hz
<b>kVA:</b>	0.05 to 10 kVA
<b>K rating:</b>	1
<b>Pri. configuration:</b>	Two winding
<b>Sec. configuration:</b>	Two winding
<b>Reverse connectable:</b>	Yes
<b>Winding material:</b>	Copper
<b>Electrostatic shielded:</b>	No
<b>Temperature rise:</b>	115 Deg C
<b>Insulation system:</b>	180 Deg C
<b>Enclosure rating:</b>	NEMA 3R
<b>Enclosure material:</b>	Steel
<b>Construction style:</b>	Enclosed - Encapsulated Core & Coil
<b>Mounting type:</b>	Wall
<b>Connection type:</b>	Wire Leads
<b>Cooling:</b>	Air/dry
<b>Agency approvals:</b>	UL Listed, CSA Approved
<b>Warranty:</b>	10 years




**Acme Buck Boost Transformer**


**T181047 - T211689**




DESIGN A



DESIGN B



DESIGN C

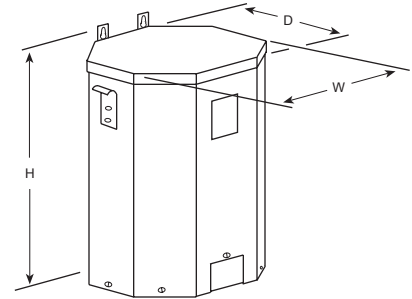

DESIGN D

**Dimensions (in inches)**

Part #	kVA	Height	Width	Depth	Weight (lbs)	Dimensional Drawing
T181047	0.05	6.41	3.14	3.05	4	A
T181048	0.1	7.16	3.89	3.67	5	A
T181049	0.15	7.16	3.89	3.67	7	A
T181050	0.25	8.68	4.08	3.88	10	B
T181051	0.5	9.06	4.37	4.2	15	B
T181052	0.75	9.68	4.75	4.51	19	B
T111683	1	10.5	5.5	5.13	24	B
T111684	1.5	11.62	5.5	5.13	30	B
T111685	2	13	5.5	5.13	38	B
T111686	3	11.5	10.31	7.13	55	C
T111687	5	14.38	10.31	7.13	75	C
T211688	7.5	20.81	11.12	10.84	125	D
T211689	10	20.81	11.75	11.59	160	D